


# On-prem Appliance Specification Sheet

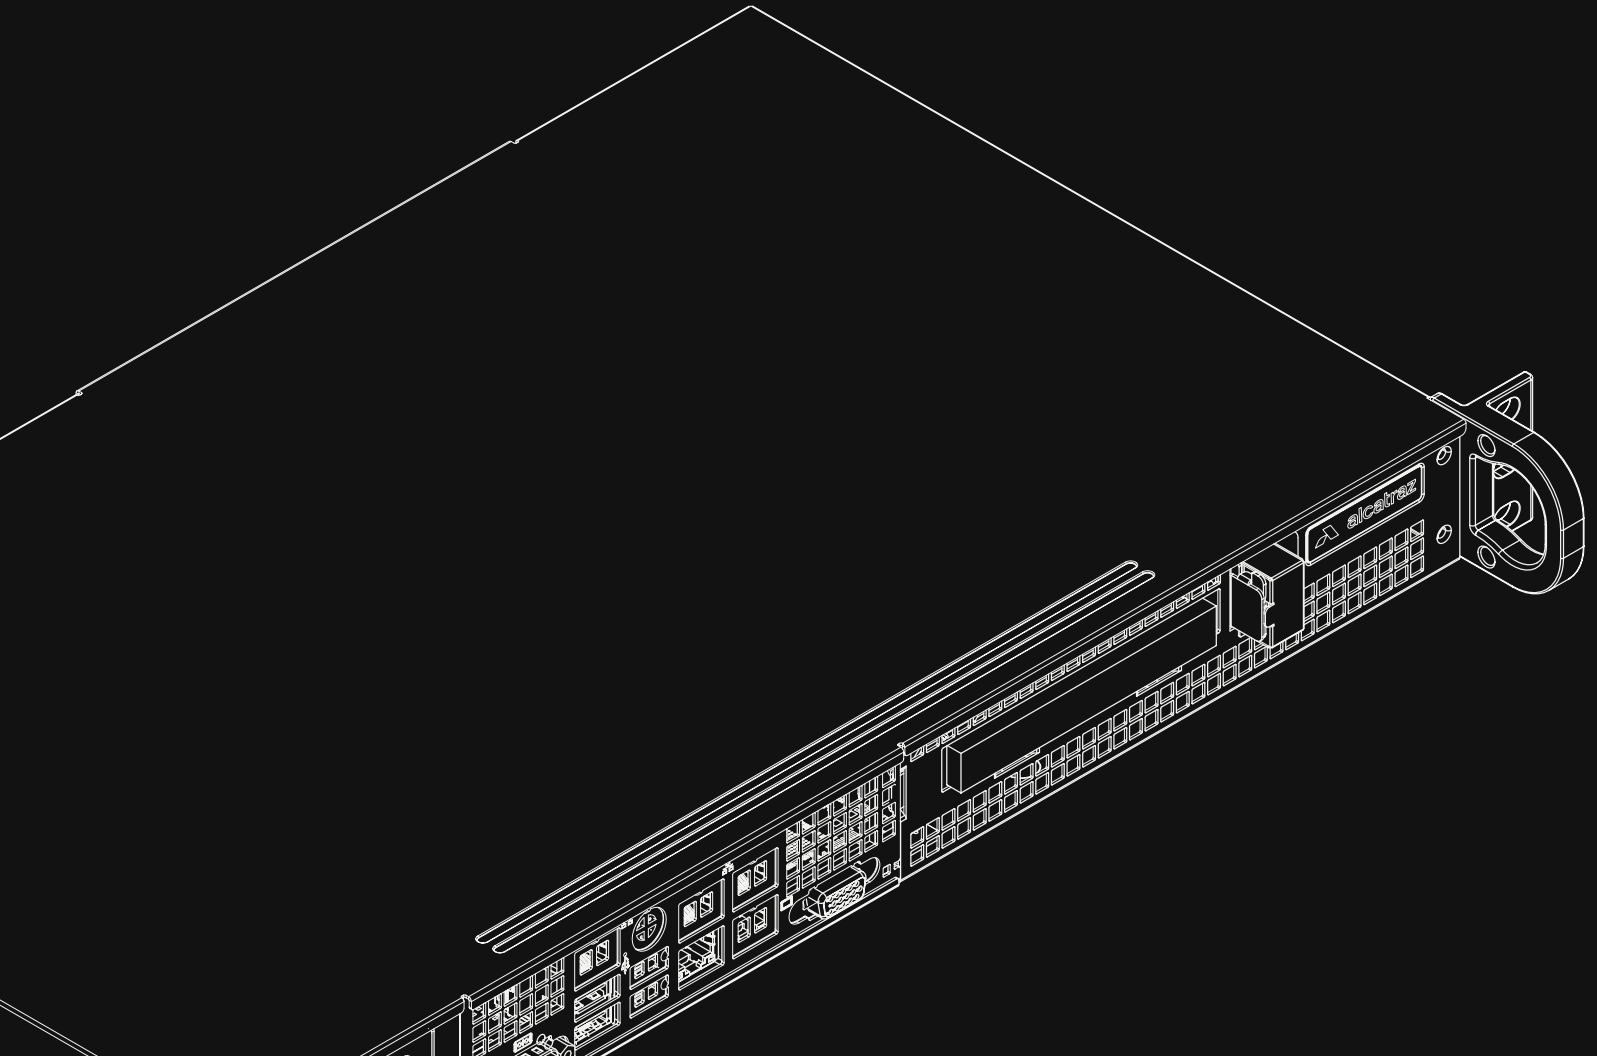

2

The Alcatraz AI Appliance brings the power of the Alcatraz Administration Portal out of the cloud and into the customer's IT infrastructure. Customers can manage devices, users and profiles from the easy to use browser based interface on PCs or mobile device on their network.

## Key Features

Preloaded and configured with Alcatraz's Administration Portal software

Easy to to install

Compatible with all current and future Alcatraz products

## Specifications

|               |                        |                                                                   |
|---------------|------------------------|-------------------------------------------------------------------|
| System        | Software               | Alcatraz Administration Portal                                    |
|               | Operating System       | Windows Server 2019                                               |
|               | Network Connection     | 1 GbE                                                             |
|               | Network Interface      | 2 × 1 GbE RJ-45 ports (1000Base-T)                                |
|               | Video Outputs          | None                                                              |
|               | Local Viewing          | Initial system configuration                                      |
|               | Out-of-band management | IPMI                                                              |
| Mechanical    | Form Factor            | 1U rack mount chassis                                             |
|               | Dimensions (LxWxH)     | 1.7" x 17.2" x 9.8" (43mm x 437mm x 249mm)                        |
|               | Weight                 | 12lbs (3.63kg)                                                    |
| Electrical    | Power Input            | 100 to 240 V AC, 50/60 Hz, auto-switching                         |
|               | Power Supply           | 200W Low Noise AC-DC power supply with PFC                        |
|               | Power Consumption      | 2.6 Amp Max                                                       |
| Environmental | Operating Temperature  | 10°C to 35°C (50°F to 95°F)                                       |
|               | Storage Temperature    | −40°C to 65°C (−40°F to 149°F)                                    |
|               | Humidity               | 10% to 80% relative humidity with 29°C (84.2°F) maximum dew point |



# Specifications

|                      |                           |                                                                                                                        |
|----------------------|---------------------------|------------------------------------------------------------------------------------------------------------------------|
| Supplied Accessories | Bezel                     | 1, front                                                                                                               |
|                      | Power Cords               | 1                                                                                                                      |
| Certifications       | Safety                    | CSA/EN/IEC/UL 60950-1 Compliant, UL or CSA Listed (USA and Canada), CE Marking (Europe)                                |
|                      | Electromagnetic Emissions | FCC Class A, EN 55032 Class A, EN 61000-3-2/3-3, CISPR 32 Class A                                                      |
|                      | Electromagnetic Immunity  | EN 55024/CISPR 24, (EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11) |
|                      | ROHS                      | EN 50581:2012                                                                                                          |

# Outline Dimensions

